


TRIUMPH TIGER 1200 '22-

M O U N T I N G I N S T R U C T I O N S

REF 21336

TOURING SCREEN




| ID. | PIEZA/PART | DESCRIPCIÓN | DESCRIPTION | QTY. | REF.: |
|-----|---|-------------------------------------|--------------------------------|------|-----------------|
| 1 |  | Cúpula TOURING | TOURING screen | 1 | 21336W/H/FM3 |
| 2 |  | Arandela de nylon Ø8,2 x Ø13 x 1 mm | Ø8,2 x Ø13 x 1 mm nylon washer | 4 | ARNV00000000265 |

TRIUMPH TIGER 1200 '22-

INSTRUCCIONES DE MONTAJE - MOUNTING INSTRUCTIONS - MONTAGEANLEITUNG

1


**DISASSEMBLY
DESMONTAJE**

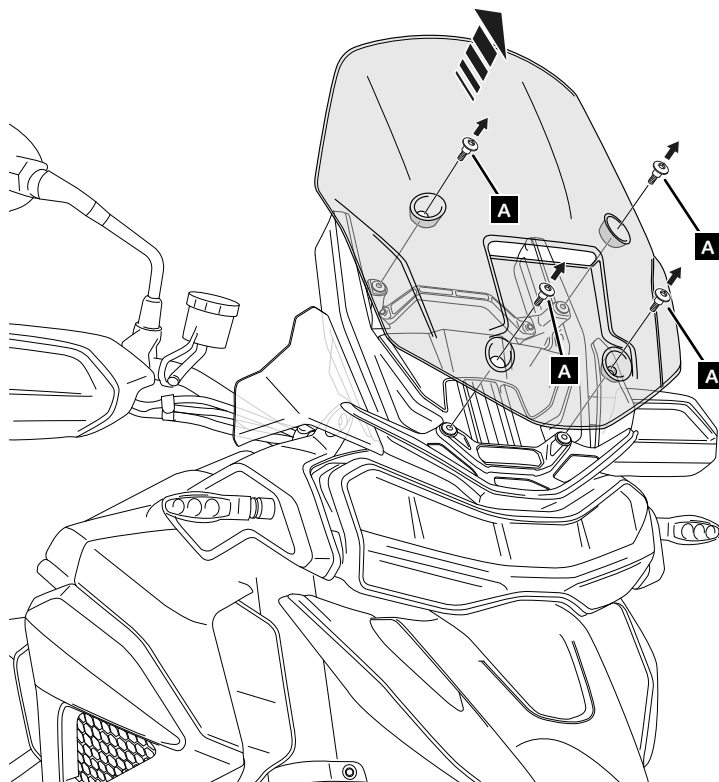


A Tornillería original
Original screws

2

**ASSEMBLY
MONTAJE**

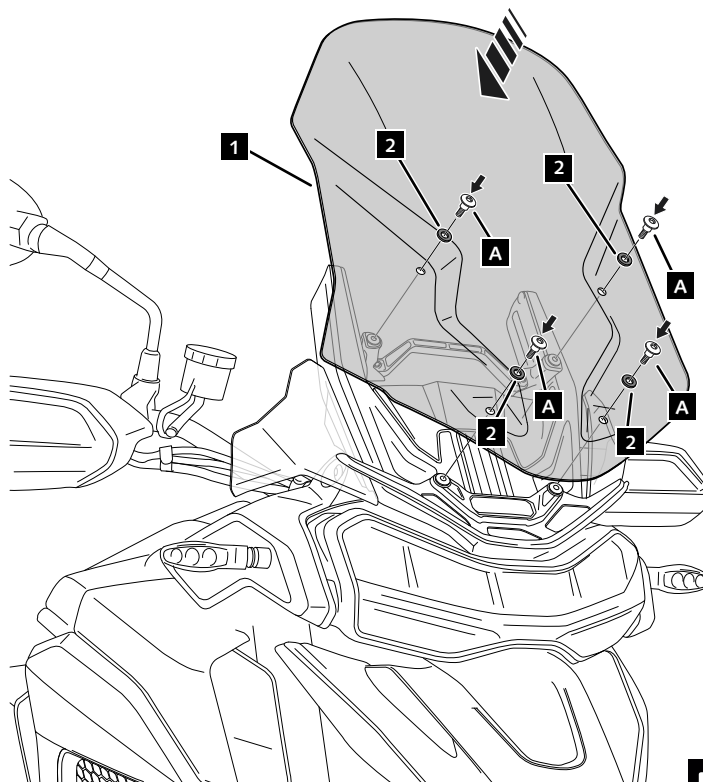

A Tornillería original
Original screws

A  Par de apriete 1,9-2 Nm
Tightening torque 1,9-2 Nm

CFD FLOW SIMULATION

TOURING SCREEN

REF.21336

AERODYNAMIC TEST

**TRIUMPH TIGER 1200 GT / GT EXPLORER /
GT PRO / RALLY EXPLORER / RALLY PRO**

2022 -




AIR FLOW & PREASSURE COMPARISON

OEM

ORIGINAL SCREEN



TOURING SCREEN

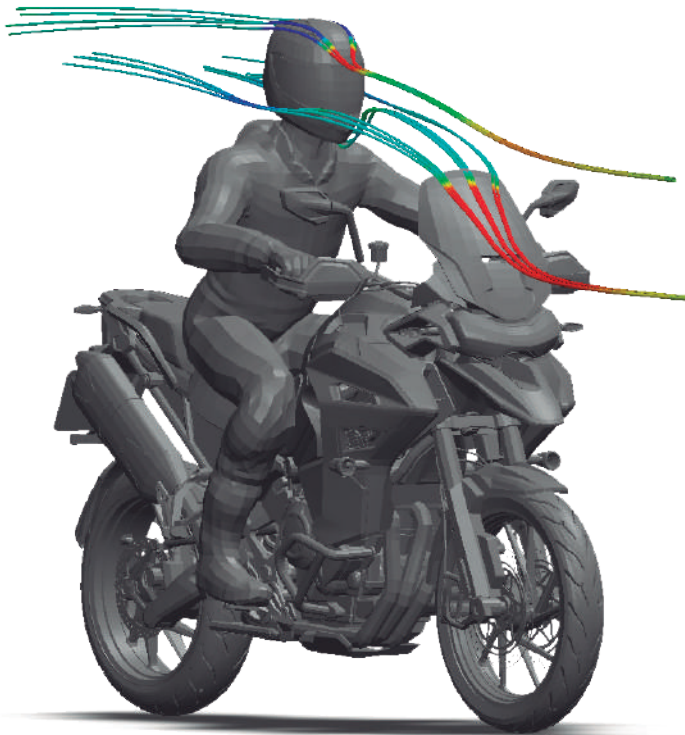


HELMET PROTECTION



UPPER BODY PROTECTION



LOW BODY PROTECTION

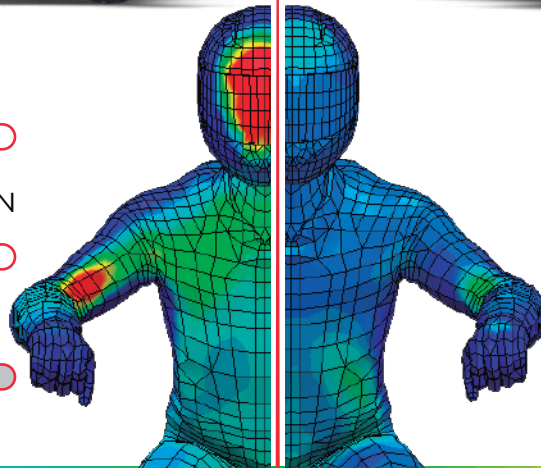

HELMET PROTECTION



UPPER BODY PROTECTION



LOW BODY PROTECTION



LOW PRESSURE

HIGH PRESSURE

TOTAL DISSIPATED PRESSURE WITH PUIG SCREEN IS EQUIVALENT TO 3,1 Kg

INCREASE WIND PROTECTION

86% WITHOUT LOSING Cx

AERODYNAMIC TEST CONDITIONS

| | | |
|-----------------|----------|----------|
| SPEED | 150 Km/h | 94 mph |
| RIDER HEIGH | 180 cm | 5.9 ft |
| TEMPERATURE | 20° | 68°F |
| RIDER POSITION | | Standard |
| LATERAL WIND | | No |
| SCREEN POSITION | | Low |

21336H +80mm/+3,15in

21336W +80mm/+3,15in

OEM

